



# FSP AAB Series

## One Power Supply Integrates Kiosk/ Terminal Application

### Features

- ✓ **IEC/EN 62368 Safety Ready**
- ✓ **ATX integrated DC output 24V**
- ✓ AC input 100V-240V
- ✓ ATX Form Factor: 140mm(L)x150mm(W)x86mm(H)
- ✓ MTBF>100K hrs at 25°C
- ✓ Operating Temp: 0-50 °C at full load
- ✓ Efficiency Certificate: Bronze
- ✓ Safety Certificates: CE, TUV, UL



### Rating Table

Model	Wattage	3.3V	5V	12V1	12V2	-12V	5Vsb	-5	24V
FSP400-80AAB	400	0-16	0-16	0.03-18	0-18	0-0.5	0-3	0-0.1	0-8
FSP500-80AAB	500	0-18	0-18	0.03-18	0-18	0-0.5	0-3	0-0.1	0-8
FSP600-80AAB	600	0-20	0-20	0.03-18	0-18	0-0.5	0-3	0-0.1	0-8




# FSP AAB Series

## One Power Supply Integrates Kiosk/ Terminal Application

Previously:  
3 PSUs for 1 system




For Monitor

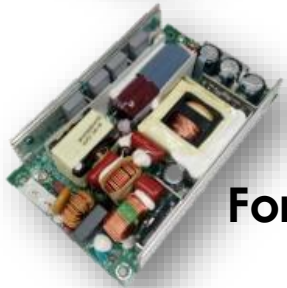

For Printer/Counter



For Main System

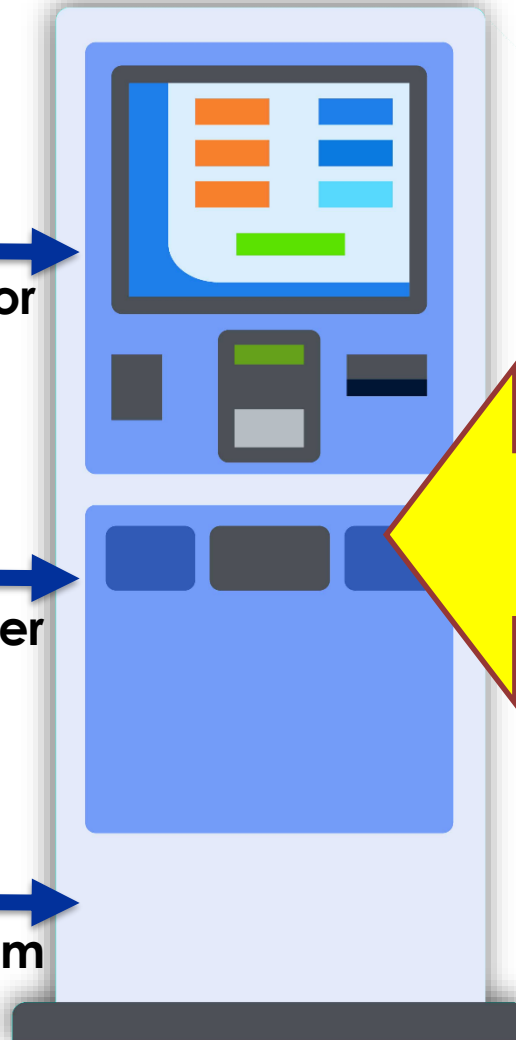

Now:  
1 PSU for 1 system



FSP AAB Series



PSU Cost Reduction



More Design Space